

1/9

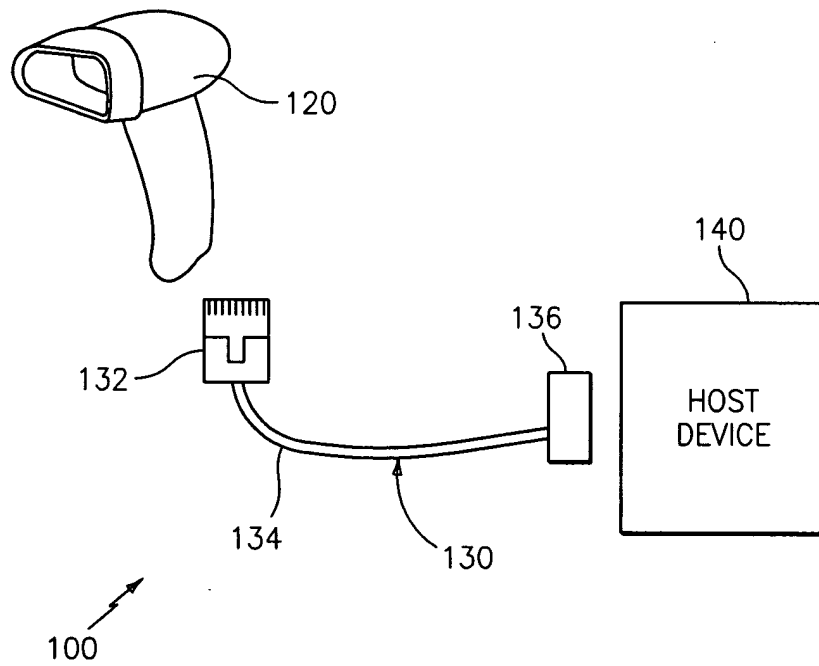


FIG. 1

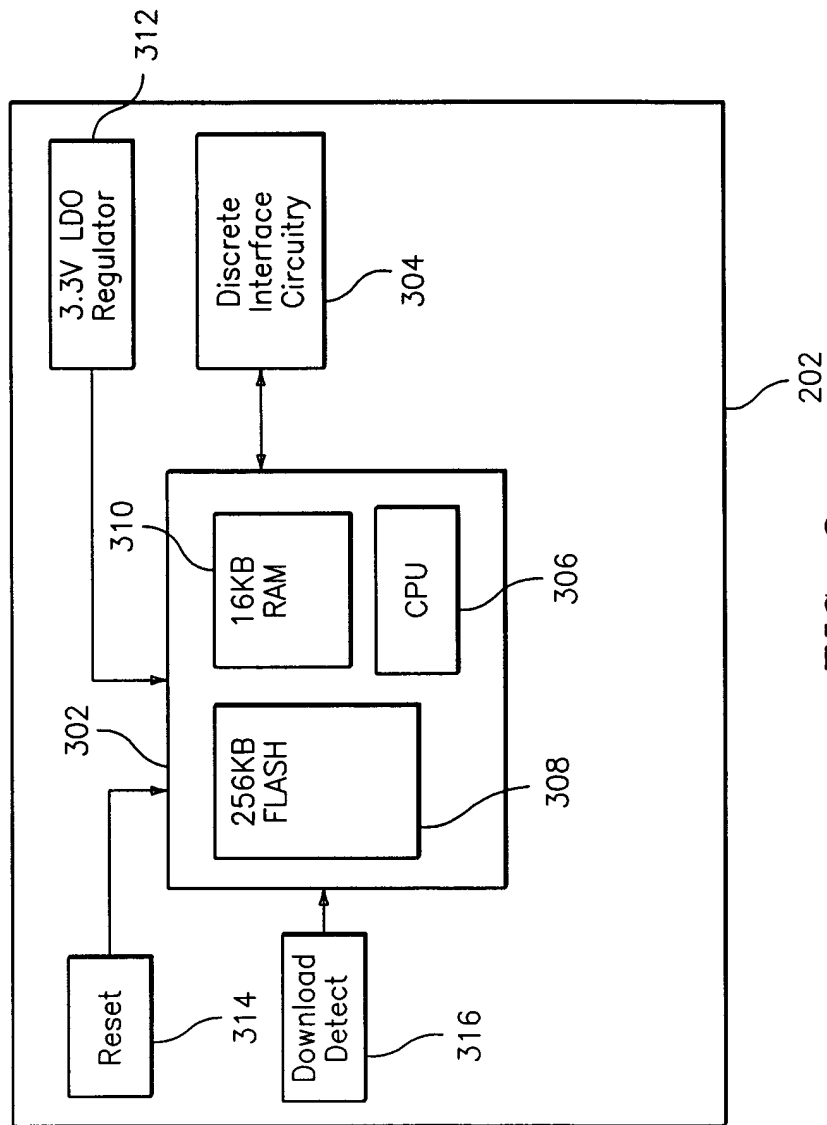


FIG. 3


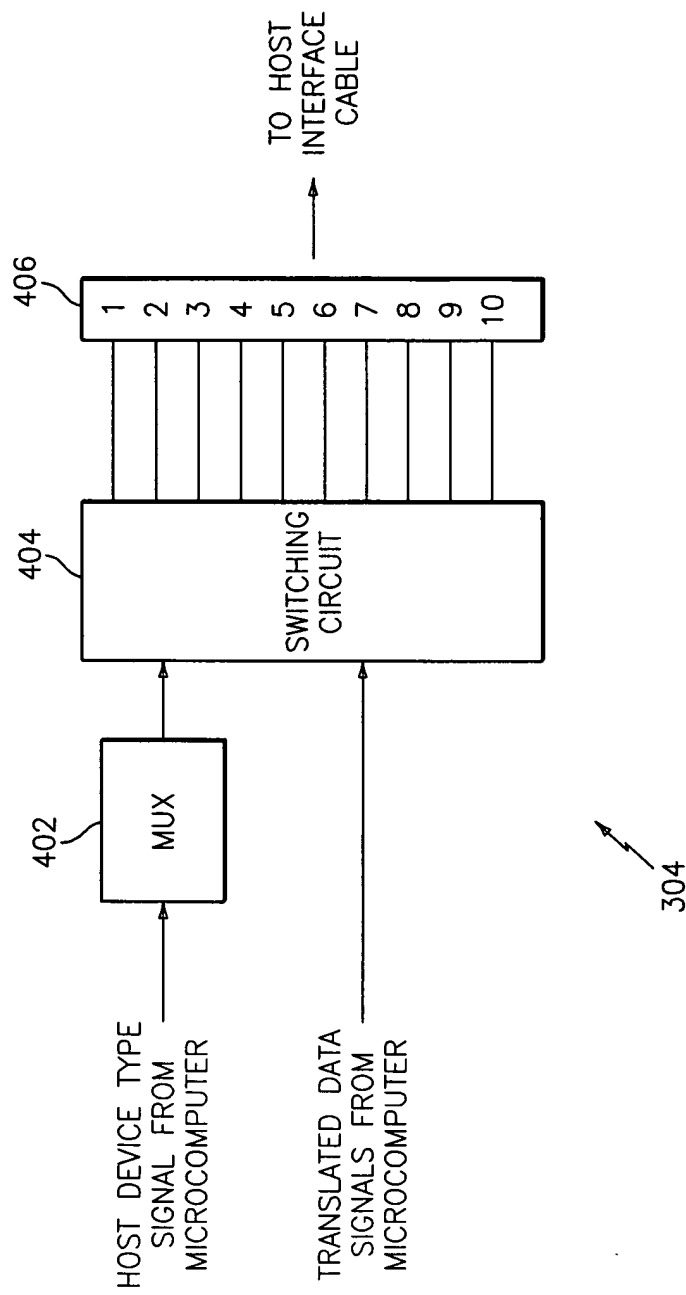


FIG. 4


Host Interface									
pin #	RS-232	USB	Synapse	Wand Emulation	Keyboard Wedge	IBM 468x	Undecoded	RS232 Download	USB Download
1		jumper to 6(1)	SYN_CLK				DBP		jumper to 6(1)
2	+5V	+5V	+5V	+5V	+5V	+5V	+5V	+5V	+5V
3	GND	GND	GND	GND	GND	GND	GND	GND	GND
4	TXD			WAND_DBP	KBD_CLK	IBM_A	ENABLE	TXD	
5	RXD	D+		WAND_CTS	TERM_DAT		SOS		D+
6	RTS	jumper to 1	SYN_DAT	WAND_RTS	KBD_DAT	IBM_B	TRIG	RXD	jumper to 1
7	CTS	D-			TERM_CLK		DECODE		D-
8								Tied to +5V	
9	Reserved for EAS								
10									

FIG. 5

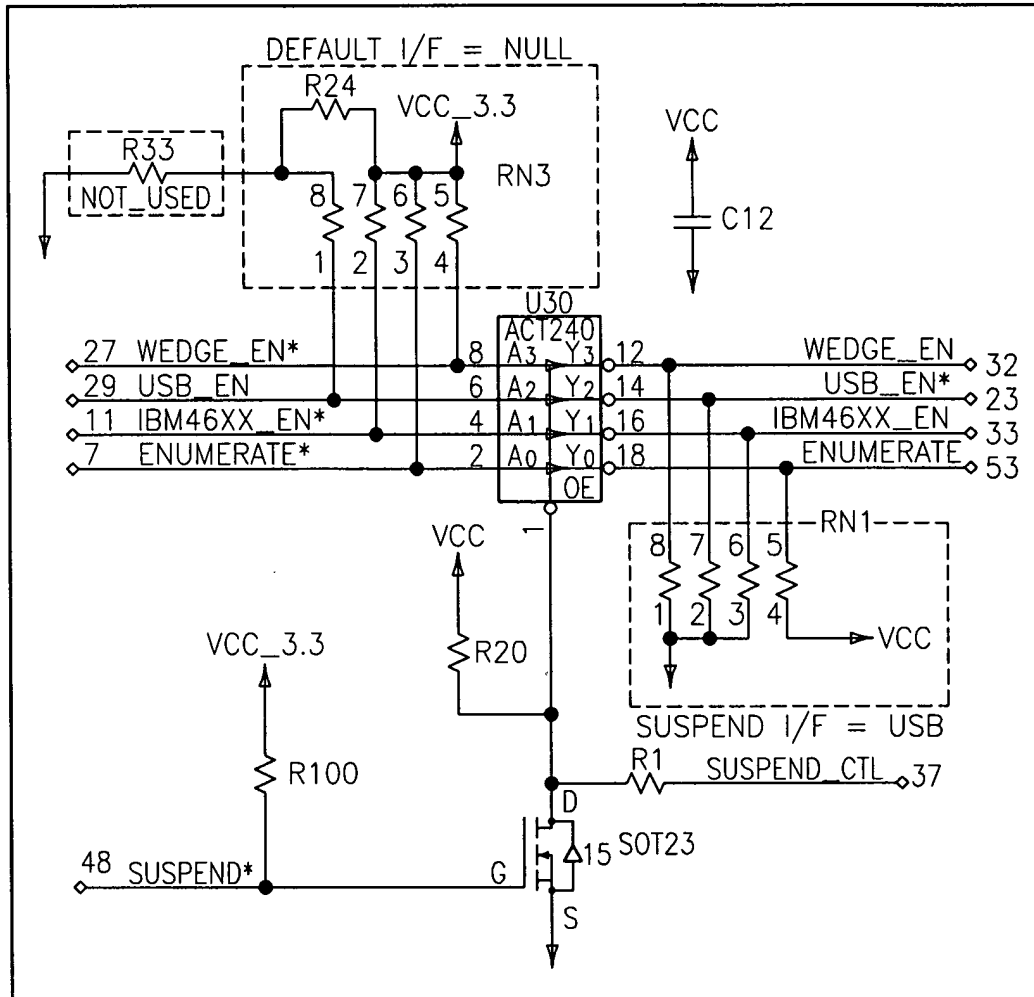

402

FIG. 6A

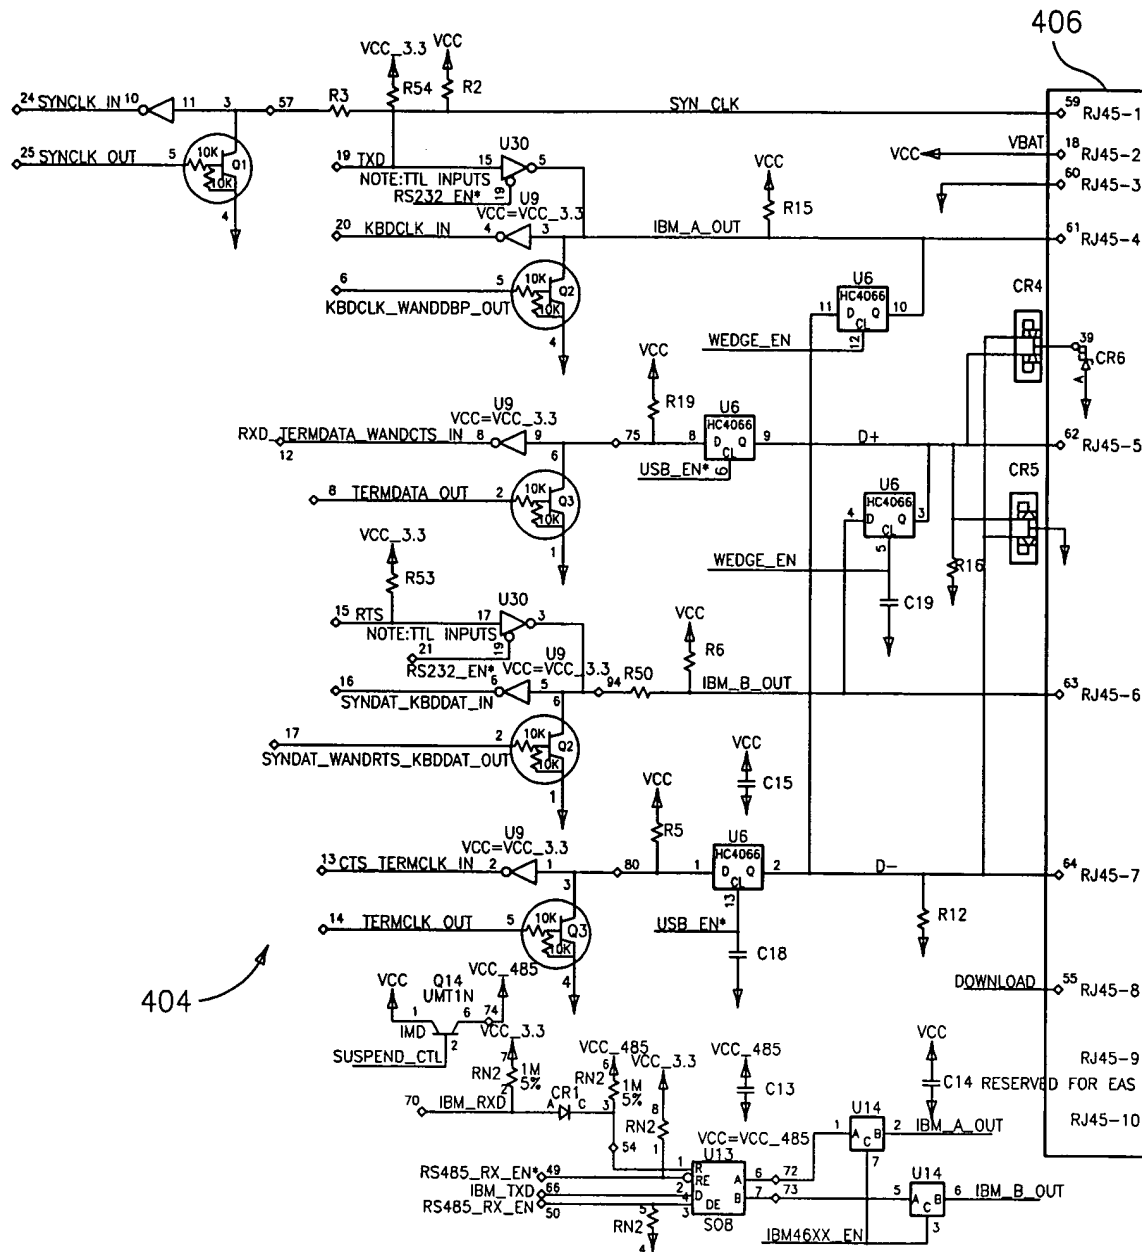

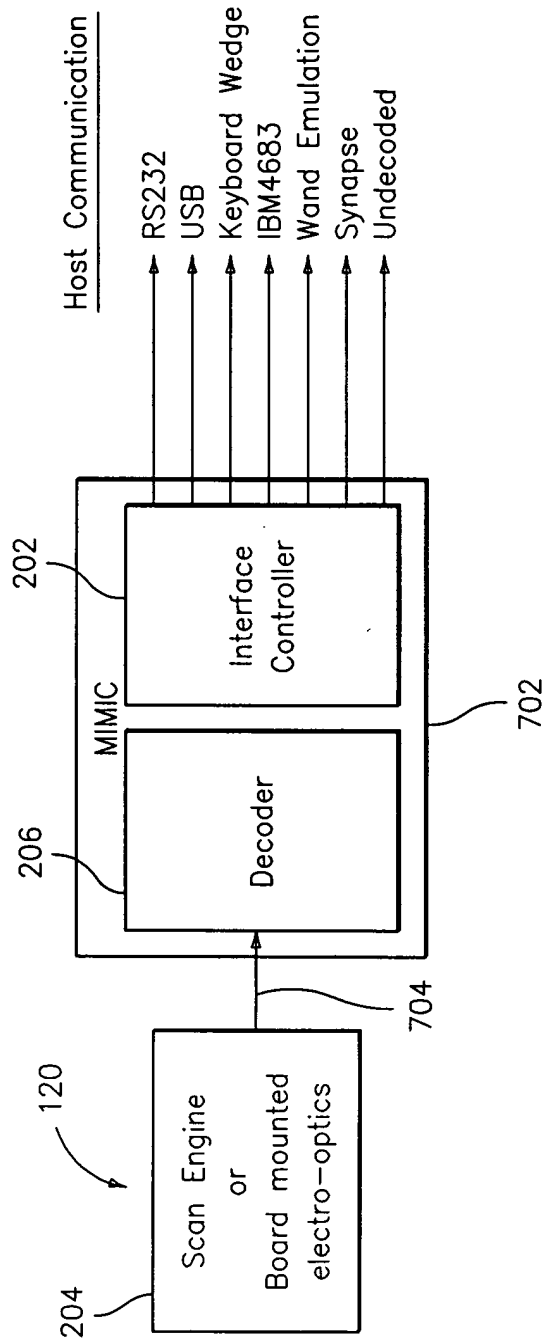
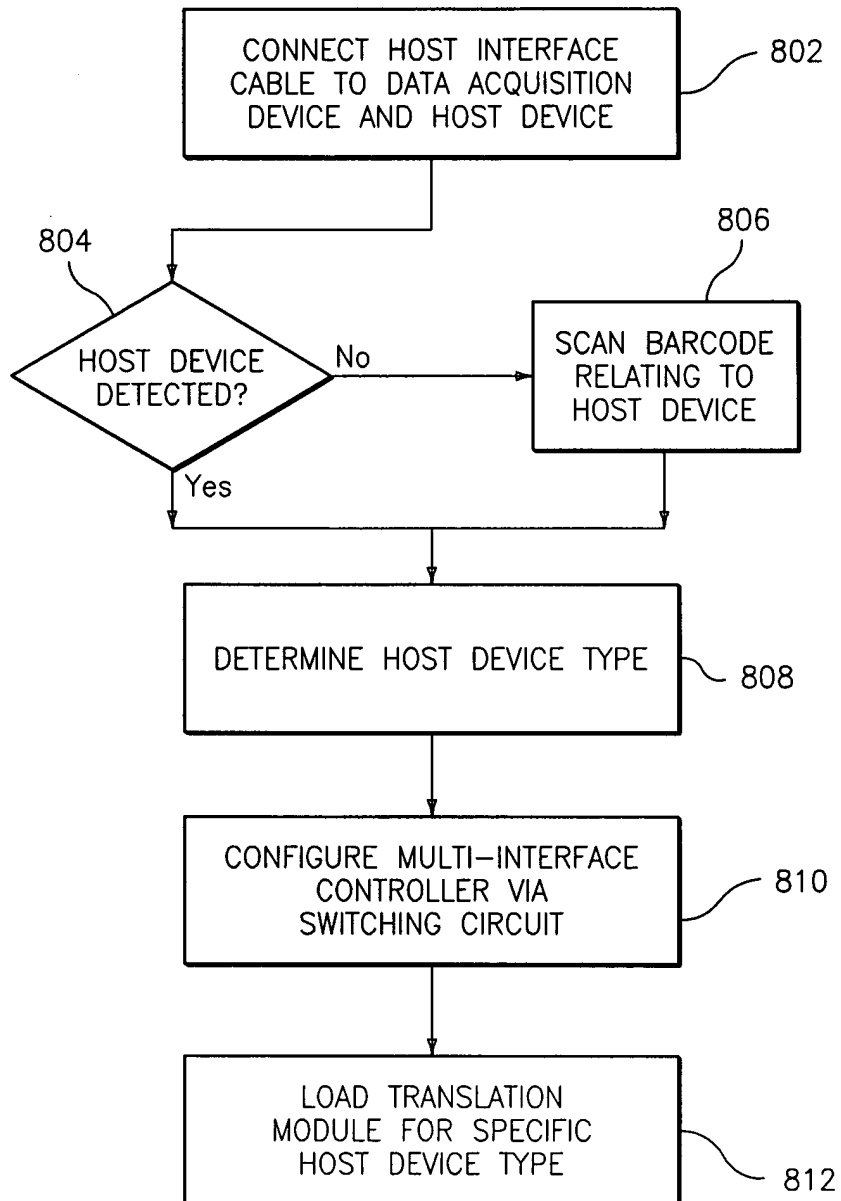


FIG. 7

*FIG. 8*